


# **NAIVETE**

## **COLOR BOARD AND INTRODUCTION**

---

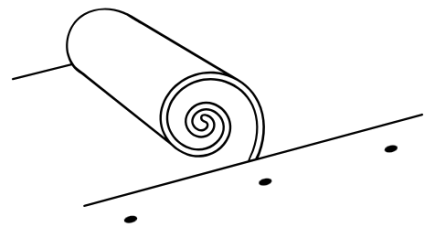

## ABOUT GLOBALFLOR

---

Globalflor® is registered in European Union, owned by Shanghai Bomei Industrial Corporation Ltd, which is a Taiwan investment in China. We Globalflor International Corporation Ltd specializing in the production of vinyl flooring materials include homogeneous flooring, heterogeneous flooring, ESD flooring, sports flooring, rubber-plastic flooring, LVT and SPC. They have been widely used in areas such as Transport, Education, Healthcare, Commercial Buildings, Offices, Residences, Sports and other areas.

Our advanced machineries were imported from German and Japan. At the same time, over 500 legal staffs insist on providing dedicated international standard support with assistance on logistics, dedicated packaging and quality control for global customers. Till now, our monthly capacity can achieve 6,000,000 square meters.

Products of high quality and fashionable, widely used in a variety of architecture, not only has the broad masses of the domestic market, but also been distributed to over 40 countries.

We are committed to sustainable development and customer health protection. Proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health, we have developed the use of a phthalate free plasticizer technology for our vinyl floors which is approved for medical class tools and toys intended to be placed in the mouth by children.

**At Globalflor**, we strive to support our professional customers and end-users in creating healthy, beautiful, alive and sustainable living spaces. Working with industry partners, we are bringing our best thinking and efforts toward making a positive impact on people and the planet.

**Welcome!**

**Join us and grow together!**

The logo for Globalflor, featuring the word "GLOBALFLOR" in a bold, sans-serif font. The letter "O" is replaced by a stylized globe icon with latitude and longitude lines.

**Phthalate-free  
100%**



**IN-GZ-CP-  
5627-23105**


## AVAILABLE COLORS

---

A homogeneous series suitable for the education system, perfect for various pattern splicing such as animals and cartoon characters, making the entire space full of childlike fun.



GFN 20021  
White



GFN 20022  
Beige



GFN 20026  
Light Grey

### Key features

Solid colors



GFN 20027  
Dark Grey



GFN 20029  
Yellow



GFN 20030  
Orange

Soft and fully flexible

Phthalate-free plasticizer for health and safety



GFN 20031  
Light Green



GFN 20032  
Red



GFN 20033  
Dark Green

### More documents

available for

download on

**NAIVETE webpage**

Naivete - TDS

Naivete - Installation  
Guide

Naivete -

Maintenance Guide

Naivete - MSDS


Naivete - Warranty



GFN 20035  
Light Blue



GFN 20036  
Dark Blue



GFN 20046  
Black

# DATA SHEET

Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check official website at [www.bomeiflor.com](http://www.bomeiflor.com)

		NAIVETE
Thickness	EN428	2.0mm
Width	EN426	2m
Length <sup>[1]</sup>	EN426	20m
Weight	EN420	3400g/m <sup>2</sup>
Plasticizer <sup>[2]</sup>		DOTP
Surface treatment		PUR
Wear resistance	EN429	T
Classification	EN649	34/43
Fire rating	EN13501	Bfl-s1
Slip resistance	DIN51130	R9
Color fastness	ISO105-B02	≥6
Electrical resistance	EN1081	2*10 <sup>10</sup> ohm
Static electrical propensity	EN1815	<2kV
Dimension stability <sup>[5]</sup>	EN434	≤0.1%
Residual indentation <sup>[6]</sup>	EN433	0.01mm
Flexibility	EN435	No crack
Stain and chemical resistance	EN423	Excellent
Effect of castor chair	EN425	Suitable
Impact sound isolation	ISO717/2	Approx. 4dB
Smoke density	ASTM E662-13A	≤750% min
TVOC	ISO16000	<10μg/m <sup>3</sup>
Thermal resistance	EN12667	Approx. 0.01m <sup>2</sup> K/W
Formaldehyde emission	EN14041	E1
PCP	EN14041	ND

[1] Standard roll length is 20m, there may have ≤10% short rolls come out from production, short roll length between 10m and 19m.


[2] Globalflor adopts environment friendly type plasticizer DOTP only for the production.

[3] Please refer to CleanCare introduction for more details.

[4] Please refer to OHST introduction for more details.

[5] Test standard required value ≤0.4%, best measured value 0.1%. For information, not binding.

[6] Test standard required value ≤0.1mm, best measured value 0.01mm. For information, not binding.



## PHOTOS GALLERY

---

