


NATURE

COLOR BOARD AND INTRODUCTION

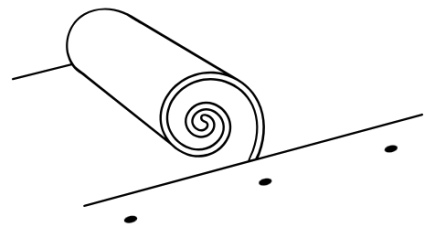

ABOUT GLOBALFLOR

Globalflor® is registered in European Union, owned by Shanghai Bomei Industrial Corporation Ltd, which is a Taiwan investment in China. We Globalflor International Corporation Ltd specializing in the production of vinyl flooring materials include homogeneous flooring, heterogeneous flooring, ESD flooring, sports flooring, rubber-plastic flooring, LVT and SPC. They have been widely used in areas such as Transport, Education, Healthcare, Commercial Buildings, Offices, Residences, Sports and other areas.

Our advanced machineries were imported from German and Japan. At the same time, over 500 legal staffs insist on providing dedicated international standard support with assistance on logistics, dedicated packaging and quality control for global customers. Till now, our monthly capacity can achieve 6,000,000 square meters.

Products of high quality and fashionable, widely used in a variety of architecture, not only has the broad masses of the domestic market, but also been distributed to over 40 countries.

We are committed to sustainable development and customer health protection. Proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health, we have developed the use of a phthalate free plasticizer technology for our vinyl floors which is approved for medical class tools and toys intended to be placed in the mouth by children.

At Globalflor, we strive to support our professional customers and end-users in creating healthy, beautiful, alive and sustainable living spaces. Working with industry partners, we are bringing our best thinking and efforts toward making a positive impact on people and the planet.

Welcome!

Join us and grow together!

The logo for Globalflor, featuring the word "GLOBALFLOR" in a bold, sans-serif font. The letter "O" is replaced by a stylized globe icon with a grid pattern.

**Phthalate-free
100%**



C10T

WALLCOVERING



GWN QS113 [Stock]
C10T



GWN QS114 [Stock]
C10T



GWN QS115 [Stock]
C10T



GWN QS117 [Stock]
C10T



C18T

FLOORING



GFN 0491 [Stock]
C18T



GFN 0492 [Stock]
C18T



GFN 0493 [Stock]
C18T



GFN 0494 [Stock]
C18T



GFN 0495 [Stock]
C18T



GFN 0496 [Stock]
C18T



GFN 0497 [Stock]
C18T



GFN 0498 [Stock]
C18T

More documents available for download on NATURE webpage

Nature - TDS

Nature - Installation Guide

Nature - Maintenance Guide

Nature - MSDS

Nature – Warranty

C20T

FLOORING



GFN 0832 [Stock]
C20T



GFN 0833 [Stock]
C20T



GFN 0834 [Stock]
C20T



GFN 0835 [Stock]
C20T



GFN 0837 [Stock]
C20T




GFN 0838 [Stock]
C20T



GFN 0839 [Stock]
C20T



GFN 0840 [Stock]
C20T

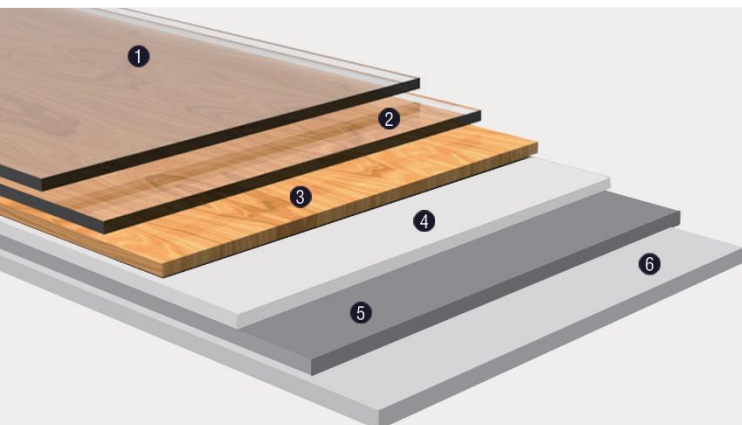

Globalflor Heterogeneous Flooring Structure

UV coating
High-density PVC wear layer
HQ Printing layer
Fiber-glass layer
Reinforce layer
Backing layer

C20T

FLOORING



GFN 0950 [Stock]
C20T



GFN 0951 [Stock]
C20T



GFN 0952 [Stock]
C20T




GFN 0953 [Stock]
C20T



GFN 0954 [Stock]
C20T



GFN 0955 [Stock]
C20T

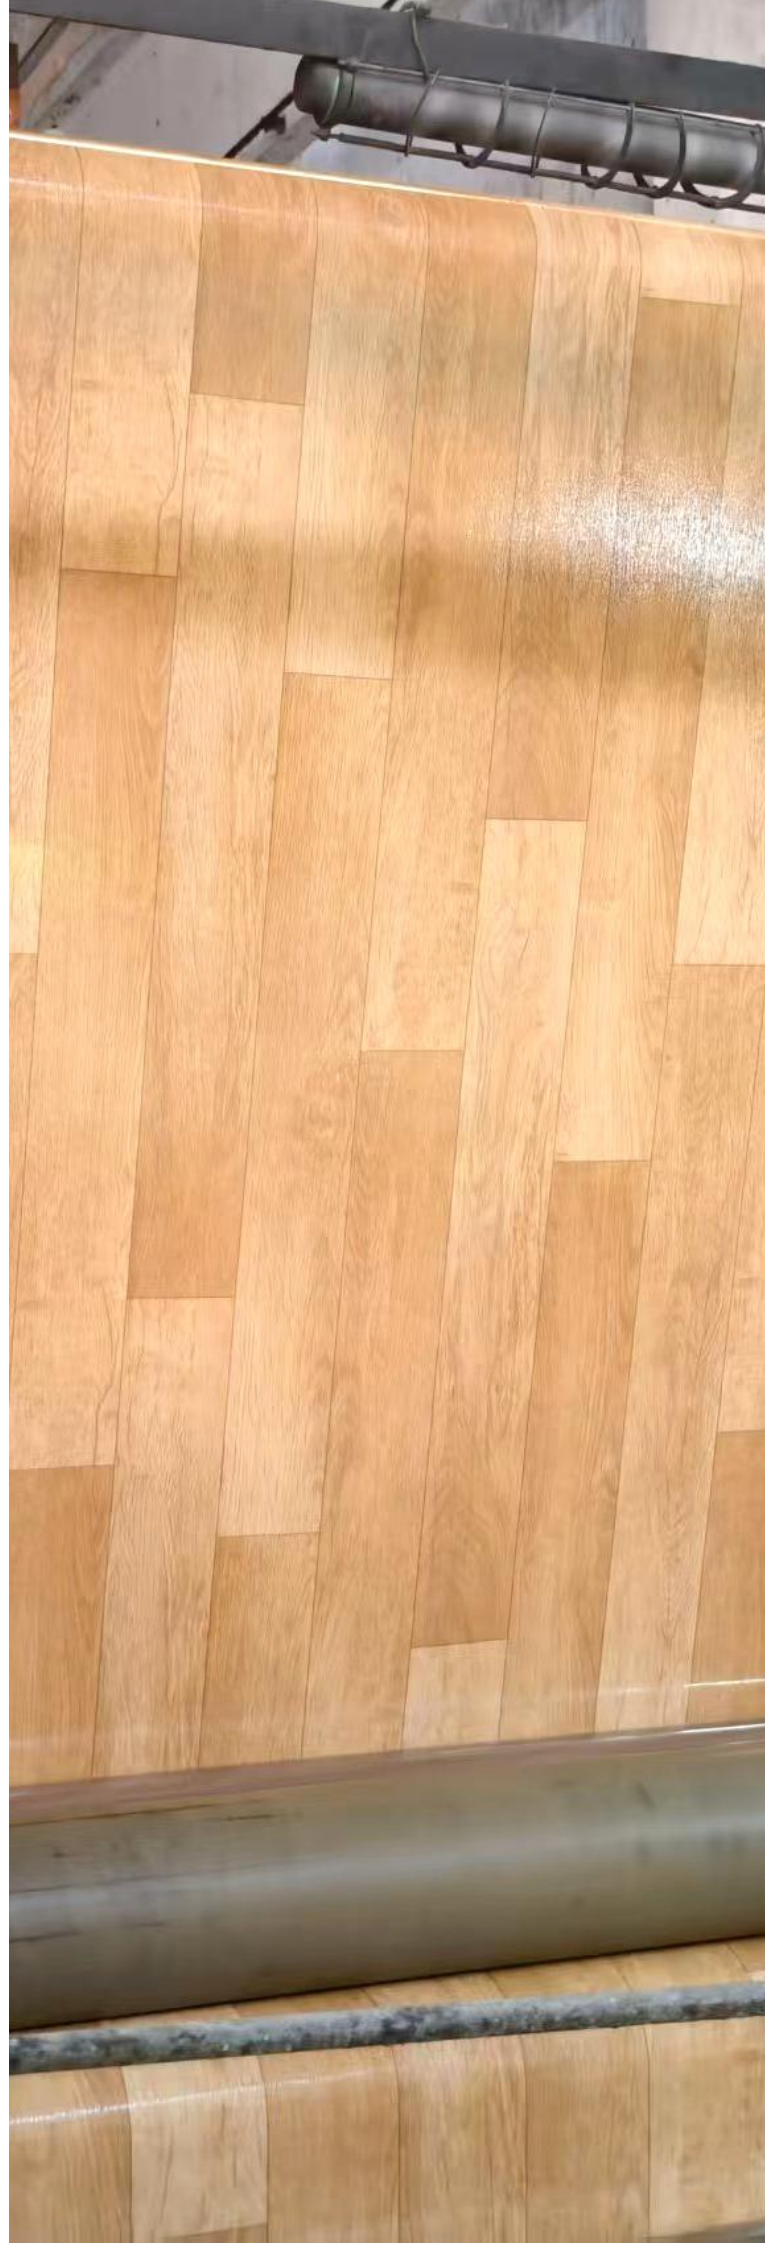

F20T

FLOORING



GFN RK31 [Stock]
F20T



GFN RK32 [Stock]
F20T



GFN RK33 [Stock]
F20T



GFN RK34 [Stock]
F20T



GFN RK35 [Stock]
F20T



GFN RK36 [Stock]
F20T



DATA SHEET

Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check official website at www.bomeiflor.com

		C10T WALL	C18T FLOOR	C20T FLOOR	F20T FLOOR
Thickness	EN428	1.00mm	1.80mm	2.00mm	2.00mm
Wear layer thickness	EN429	0.10mm	0.20mm	0.35mm	0.35mm
Width	EN426	2m	2m	2m	2m
Length ^[1]	EN426	20m	20m	20m	20m
Weight	EN430	1300g/m ²	2750g/m ²	2900g/m ²	2000g/m ²
Plasticizer ^[2]	-	DOTP	DOTP	DOTP	DOTP
Surface treatment	-	PUR	PUR	PUR	PUR
Wear resistance	EN429	T	T	T	T
Classification	EN649	-	24/33	34/43	34/43
Fire rating	EN13501	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Slip resistance	DIN51130	-	R9	R9	R9
Color fastness	ISO105-B02	≥6	≥6	≥6	≥6
Electrical resistance	EN1081	10 ¹⁰ ohm	10 ¹⁰ ohm	10 ¹⁰ ohm	10 ¹⁰ ohm
Static electrical propensity	EN1815	<2kV	<2kV	<2kV	<2kV
Dimension stability ^[3]	EN434	≤0.4%	≤0.1%	≤0.1%	≤0.1%
Residual indentation ^[4]	EN433	-	0.01mm	0.01mm	0.04mm
Flexibility	EN435	No crack	No crack	No crack	No crack
Stain and chemical resistance	EN423	Good	Good	Good	Good
Effect of castor chair	EN425	-	Suitable	Suitable	Suitable
Impact sound isolation	ISO717/2	Approx. 4dB	Approx. 4dB	Approx. 4dB	Approx. 13dB
Smoke density	ASTM E662-13A	≤750% min	≤750% min	≤750% min	≤750% min
TVOC	ISO16000	<10µg/m ³	<10µg/m ³	<10µg/m ³	<10µg/m ³
PCP	EN14041	ND	ND	ND	ND
Formaldehyde emission	EN14041	E1	E1	E1	E1

[1] Standard roll length is 20m, there may have ≤10% short rolls come out from production, short roll length between 10m and 19m.

[2] Globalflor adopts environment friendly type plasticizer DOTP only for the production.

[3] Test standard required value ≤0.4%, best measured value 0.1%. For information, not binding.

[4] Test standard required value ≤0.1mm, best measured value 0.01mm. For information, not binding.

