

COMPACT TYPE & FOAM TYPE HETEROGENEOUS VINYL FLOORING & WALLCOVERING

GLOBALFLOR GLOBALFLOR











GWN QS114 STOCK Wall 1.0T Compact



GWN QS115 STOCK Wall 1.0T Compact



GWN QS116 STOCK Wall 1.0T Compact



- 1 UV coating
- 2 High-density PVC wear layer
- 3 HQ Printing layer
- 4 Fiber-glass layer
- 6 Reinforce layer
- 6 Backing layer





GFN 0101 Floor 1.6T Compact



GFN 0102 Floor 1.6T Compact



GFN 0103 Floor 1.6T Compact



GFN 0104 Floor 1.6T Compact



GFN 0495 STOCK Floor 1.8T Compact



GFN 0496 STOCK Floor 1.8T Compact



GFN 0497 STOCK Floor 1.8T Compact



GFN 0498 STOCK Floor 1.8T Compact





Wall 1.0T Compact

It is the perfect solution for areas that need special protection, not only in wet rooms but also in other environments like healthcare and light industry. Solid colors available.




Floor 1.6T Compact

A comfortable solution for smooth and safe daily light commercial and home usage.



Floor 1.8T Compact

Fashionable wood design combined with excellent resistance to indentation, abrasion and tearing. High quality raw materials and innovative surface treatment ensure long-lasting performance and appearance, easy maintenance and excellent life cycle costs.



Floor 2.0T Compact

Creative solutions for commercial applications such as healthcare, education, stores, shops and hospitality.




Floor 2.0T Pro Foam

Specially for special usages and areas where acoustics and wear-resistance are important equally. This foam collection also offers good underfoot comfort.

TECHNICAL DATA

		1.0T	1.6T	1.8T	2.0T	2.0T PR0
° ×	Total Thickness EN 428	1.0mm	1.6mm	1.8mm	2.0mm	2.0mm
	Wear Layer Thickness EN429	0.1mm	0.1mm	0.2mm	0.35mm	0.35mm
	Weight EN 430	1300g/m ³	2300g/m ³	2750g/m ³	2900g/m ³	2000g/m ³
	Roll Width EN 426	2m	2m	2m	2m	2m
	Roll Length EN 427	20m	20m	20m	20m	20m
B _{fi} -s1	Fire Rating EN 13501	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
DS	Slip Resistance DIN 51130	R9	R9	R9	R9	R9
	Abrasion Group EN 649	T	T	Т	Т	Т
	Castor Chair Test EN 425	Suitable	Suitable	Suitable	Suitable	Suitable
7	Color Fastness EN 105–B02	≥6	≥6	≥6	≥6	≥6
°K ₪	Dimension Stability EN 434	≤0.1%	≤0.1%	≤0.1%	≤0.1%	≤0.1%
5	Flexibility EN 435	Excellent	Excellent	Excellent	Excellent	Excellent
	Residual Indentation EN 433	≤0.1mm	≤0.1mm	≤0.1mm	≤0.1mm	≤0.2mm
	Sound Sound Absorption EN ISO 717–2	\approx 4dB	≈4dB	≈4dB	≈4dB	≈13dB
	Stain Resistance EN 423	Good	Good	Good	Good	Good
T.	Static Electrical Propensity EN 1815	< 2kV				
	Surface Treatment	UV	UV	UV	UV	UV
	Usage -	Wall	Floor	Floor	Floor	Floor

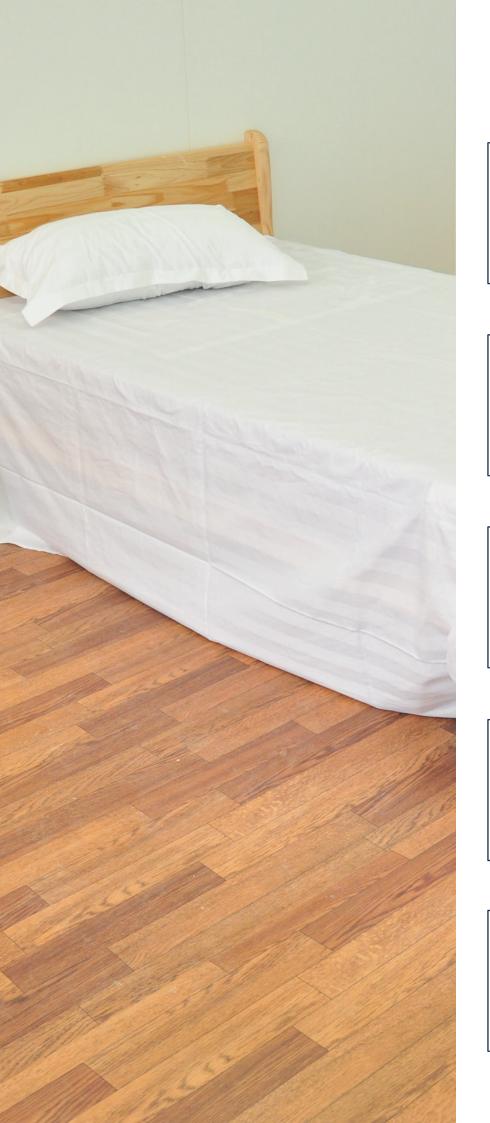





SGS International Standards Certified





Products can pass CE authorization













SHANGHAI BOMEI INDUSTRIAL CORPORATION LTD GLOBALFLOR INTERNATIONAL CO., TLD

No. 1106, Jinteng Road, Jinshan District, Shanghai 201500, China 0086 21 67666700 admin@bomeiflor.com www.bomeiflor.com / www.gflors.com

Professional Vinyl Floor Manufacturer

Homogeneous Flooring | Heterogeneous Flooring | ESD Flooring | Sports Flooring Rubber-plastic Flooring | LVT | SPC | Installation Accessaries