

COMPACT TYPE & FOAM TYPE HETEROGENEOUS VINYL FLOORING & WALLCOVERING

GLOBALFLOR GLOBALFLOR











GWN QS114 STOCK C10T



C10T



GWN QS117 STOCK C10T



- 1 UV coating
- 2 High-density PVC wear layer
- 3 HQ Printing layer
- 4 Fiber-glass layer
- 6 Reinforce layer
- 6 Backing layer





GFN RK31 STOCK F20T



GFN RK32 STOCK F20T



GFN RK33 STOCK F20T



GFN RK34 STOCK F20T



GFN RK35 STOCK F20T



GFN RK36 STOCK F20T



GFN 0832 STOCK C20T



GFN 0833 STOCK C20T





GFN 0497 STOCK C18T



GFN 0498 STOCK C18T



Wall C10T

It is the perfect solution for areas that need special protection, not only in wet rooms but also in other environments like healthcare and light industry. Solid colors available.



Floor C20T


Creative solutions for commercial applications such as healthcare, education, stores, shops and hospitality.



Floor C18T

A comfortable solution for smooth and safe daily light commercial and home usage.

Fashionable wood design combined with excellent resistance to indentation, abrasion and tearing. High quality raw materials and innovative surface treatment ensure long-lasting performance and appearance, easy maintenance and excellent life cycle costs.




Floor F20T

Specially for special usages and areas where acoustics and wear-resistance are important equally. This foam collection also offers good underfoot comfort.

TECHNICAL DATA

		C10T	C18T	C20T	F20T
• 🗸	Total Thickness EN 428	1.0mm	1.8mm	2.0mm	2.0mm
© ×	Wear Layer Thickness EN429	0.1mm	0.2mm	0.35mm	0.35mm
	Weight EN 430	1300g/m ³	2750g/m ³	2900g/m ³	2000g/m ³
	Roll Width EN 426	2m	2m	2m	2m
	Roll Length EN 427	20m	20m	20m	20m
B _{fl} -s1	Fire Rating EN 13501	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
DS	Slip Resistance DIN 51130	R9	R9	R9	R9
	Abrasion Group EN 649	Т	T	T	T
	Castor Chair Test EN 425	Suitable	Suitable	Suitable	Suitable
	Color Fastness EN 105-B02	≥6	≥6	≥6	≥6
K Z	Dimension Stability EN 434	≤0.1%	≤0.1%	≤0.1%	≤0.1%
5	Flexibility EN 435	Excellent	Excellent	Excellent	Excellent
	Residual Indentation EN 433	≤0.1mm	≤0.1mm	≤0.1mm	≤0.2mm
	Sound Sound Absorption EN ISO 717–2	≈2dB	≈4dB	≈4dB	≈13dB
	Stain Resistance EN 423	Good	Good	Good	Good
F	Static Electrical Propensity EN 1815	< 2kV	< 2kV	< 2kV	< 2kV
	Surface Treatment	PUR	PUR	PUR	PUR
	Usage -	Wall	Floor	Floor	Floor

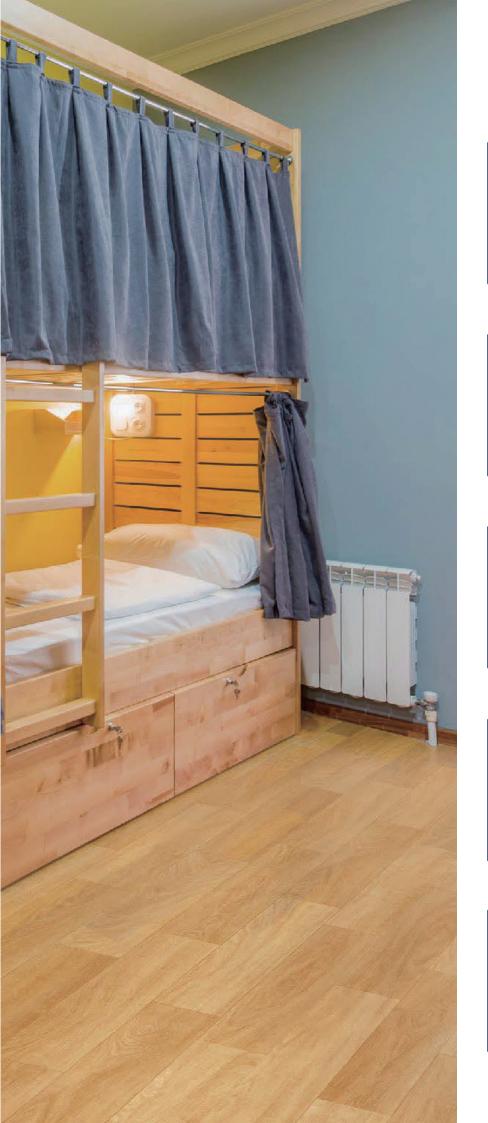



Low VOC and other emissions



SGS International Standards Certified



100% Recyclable



Products can pass CE authorization













SHANGHAI BOMEI INDUSTRIAL CORPORATION LTD GLOBALFLOR INTERNATIONAL CO., TLD

0086 21 67666700 admin@bomeiflor.com www.bomeiflor.com

Professional Vinyl Floor Manufacturer

Homogeneous Flooring | Heterogeneous Flooring | ESD Flooring | Sports Flooring | Rubber-plastic Flooring | Woven Flooring | LVT | SPC | Installation Accessaries and Tools