


SOLID 1.0T
SUPERONG
WALLCOVERING






W1051



W1051 Snow White



W1052 Almond White

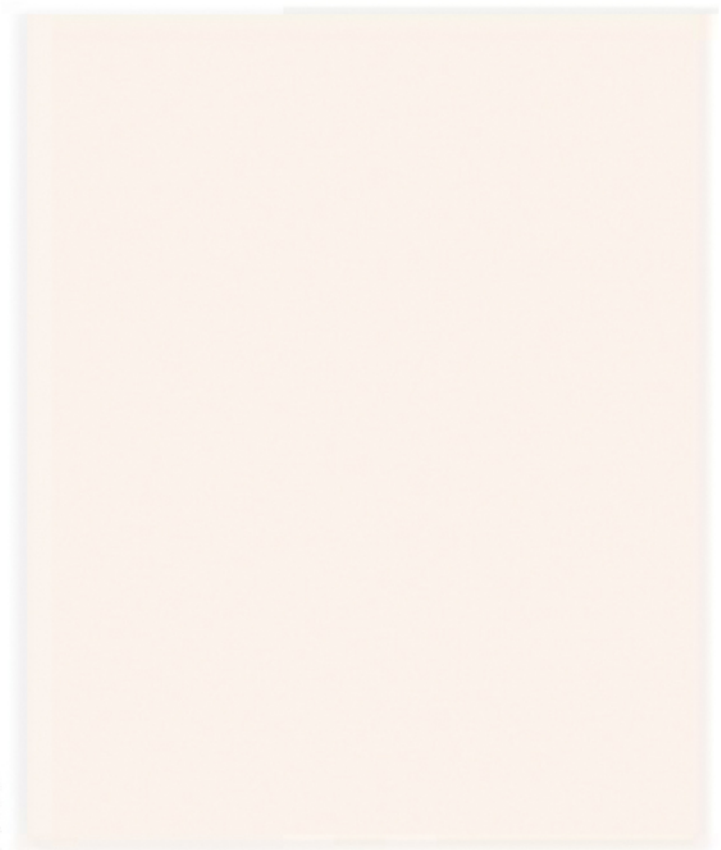

W1052



W1021




W1021 Beige



W1022 Ivory



W1022

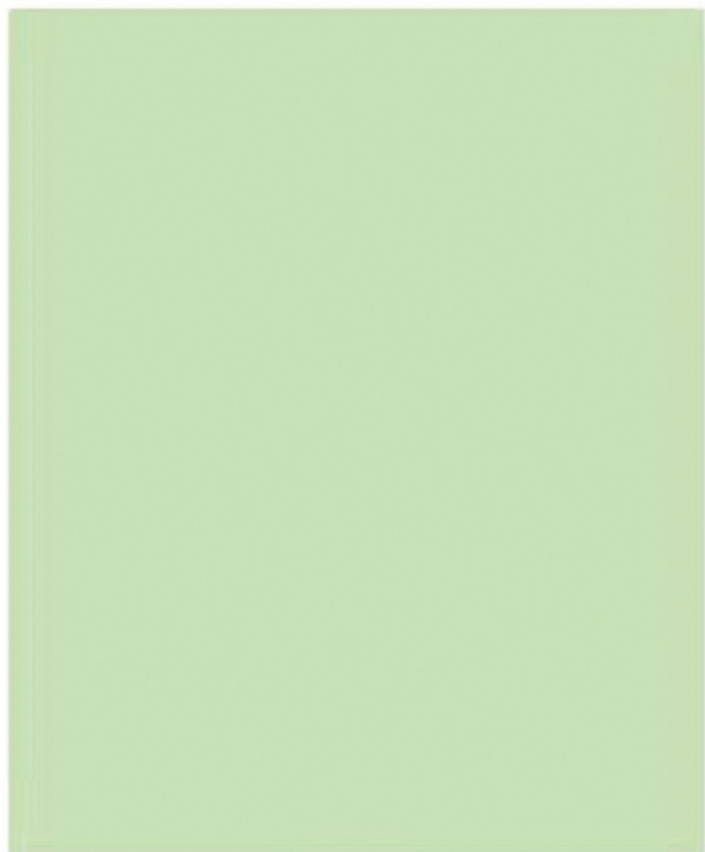


W1031



W1031 Light Green



W1041 Smoky Blue

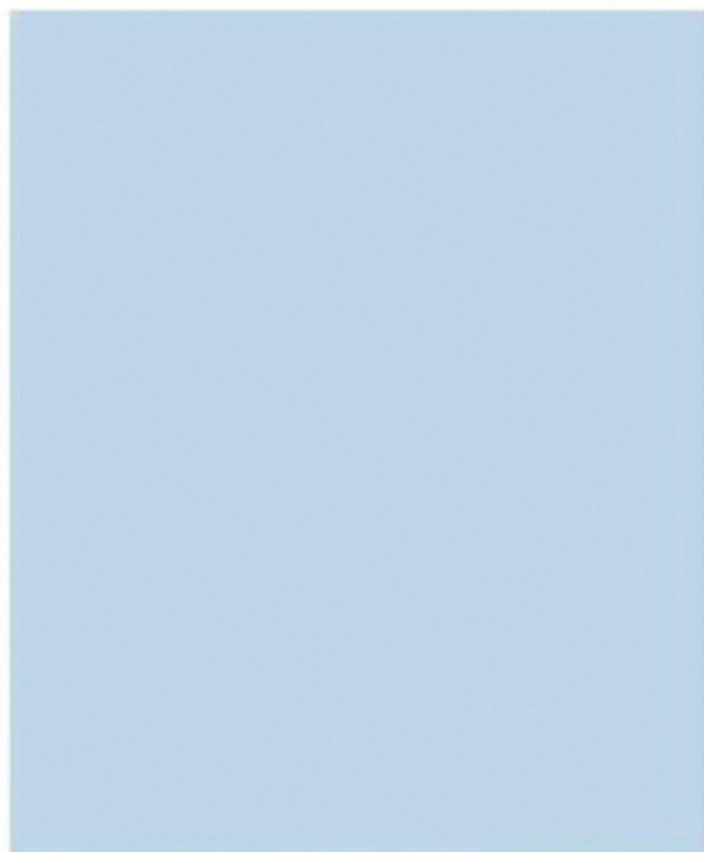

W1041




W1061



W1061 Light Grey



W1062 Middle Grey

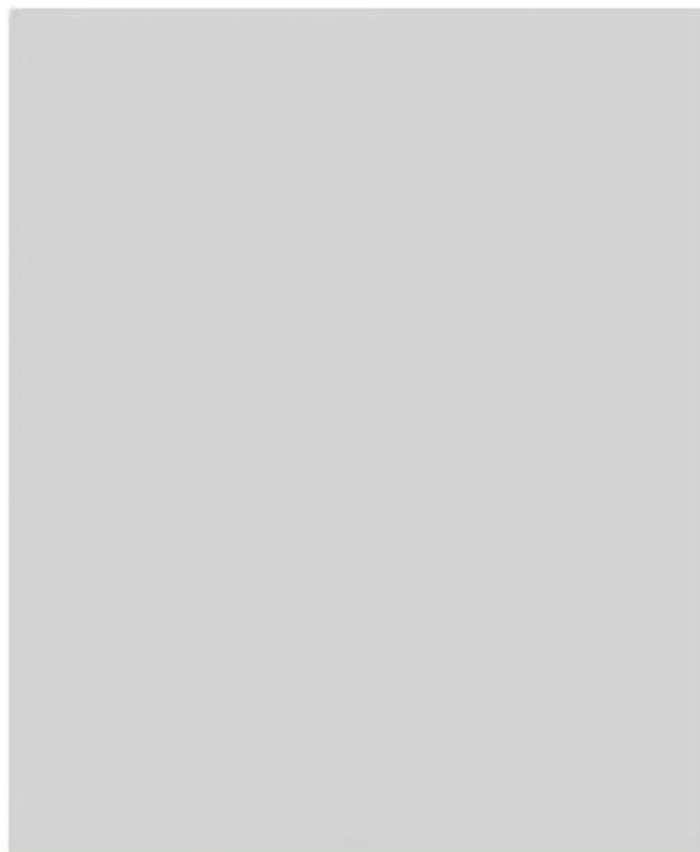

W1062

<i>Description</i>	<i>Standard</i>	<i>Result</i>
Total thickness	EN 428	1.0 mm
Wear layer thickness	EN 429	0.1 mm
Weight	EN 430	1350 g/m ²
Width	EN 426	2 m
Length of sheet	EN 426	20 m

CLASSIFICATION

Fire rating	GB 8624-1997	B1
Toxic testing	GB 18586-2001	Good
Electrical resistance	EN 1081	> 10 ⁹⁻¹⁰
Slip resistance dry	EN 13893	≥ 0.3
Slip resistance wet	EN 51 130	R9

PERFORMANCES

Abrasion group	EN 649	T
Castor chair test	EN 425	No damage
Colour fastness	EN ISO 105 - B02	≥ 6
Chemical products resistance	EN 423	Good
Dimensional stability	EN 434	≤ 0.40%
Curl resultant to heat	EN 434	≤ 4 mm
Sound reduction	EN ISO 717/2	Approx. 4 dB
Residual Indentation	EN 433	Approx. 0.04 mm
Anti-bacterial and fungicidal		Good
VOC		< 10
Surface treatment		PUR