


SUPERFLEX

COLOR BOARD AND INTRODUCTION

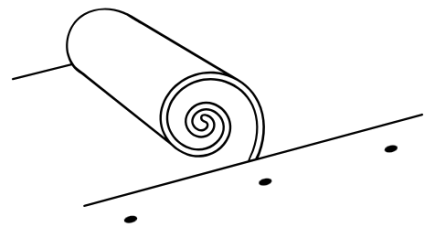

ABOUT GLOBALFLOR

Globalflor® is registered in European Union, owned by Shanghai Bomei Industrial Corporation Ltd, which is a Taiwan investment in China. We Globalflor International Corporation Ltd specializing in the production of vinyl flooring materials include homogeneous flooring, heterogeneous flooring, ESD flooring, sports flooring, rubber-plastic flooring, LVT and SPC. They have been widely used in areas such as Transport, Education, Healthcare, Commercial Buildings, Offices, Residences, Sports and other areas.

Our advanced machineries were imported from German and Japan. At the same time, over 500 legal staffs insist on providing dedicated international standard support with assistance on logistics, dedicated packaging and quality control for global customers. Till now, our monthly capacity can achieve 6,000,000 square meters.

Products of high quality and fashionable, widely used in a variety of architecture, not only has the broad masses of the domestic market, but also been distributed to over 40 countries.

At Globalflor, we strive to support our professional customers and end-users in creating healthy, beautiful, alive and sustainable living spaces. Working with industry partners, we are bringing our best thinking and efforts toward making a positive impact on people and the planet.


The logo for Globalflor, featuring the word "GLOBALFLOR" in a bold, sans-serif font. The letter "O" is replaced by a stylized globe icon with latitude and longitude lines.

**IN-GZ-CP-
5627-24062**

Welcome!

Join us and grow together!


MULTI-PURPOSE COLORS




GFS 88 101
Jewel - Red



GFS 88 201
Jewel - Orange



GFS 88 202
Jewel - Yellow




GFS 88 203
Jewel - Pink



GFS 88 301
Jewel - Dark Blue



GFS 88 303
Jewel - Blue



GFS 88 304
Jewel - Aquamarine



GFS 88 401
Jewel - Dark Green




GFS 88 403
Jewel - Green



GFS 88 501
Jewel - Gray



GFS 88 601
Jewel - Black



GFS 88 604
Jewel - Dark Gray

WOOD COLORS




GFS 588 10W
Wood - Oak



GFS 688 11W
Wood - Teak



GFS 688 12W
Wood - Teak




GFS 688 15W
Wood - Teak






GFS 688 13W
Wood - Maple




GFS 688 19W
Wood - Maple

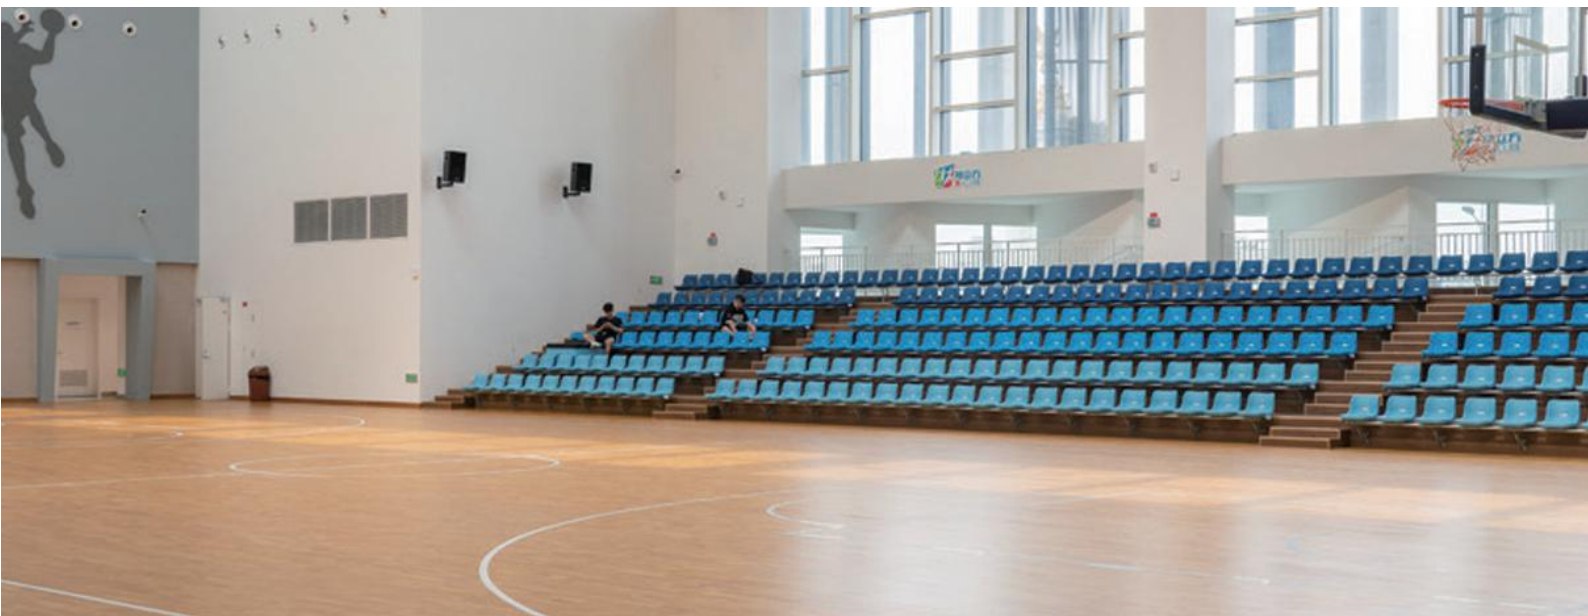

ATHLETICS COLORS




GFS 18 01
Grid - Red




GFS 28 02
Grid - Green



GFS 18 03
Sand - Dark Blue



GFS 48 02
Sand - Green



GFS 48 03
Sand - Navy Blue



GFS 88 754
Diamond - Dark Green





BRILLIANT PERFORMANCE

Low foaming rate ensures the flooring with best shock absorption, which is higher than other brands base on same thickness.



100% RECYCLE MATERIAL



COMFORT FOOT FEELING

Provide different performance levels for all ages, weights and levels of play. Good underfoot comfort, Minimize the risk of injury with integrated cushion backing.




- ① Anti-scratch pure PVC wear layer
- ② High density white stable layer with fiberglass reinforcement
- ③ High density buffer layer
- ④ Foam backing layer with special hexagon embossment

DATA SHEET

Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check official website at www.bomeiflor.com

		45T	60T	80T
Thickness	EN428	4.5mm	6.0mm	8.0mm
Wear layer thickness	EN429	0.6mm	0.6mm	0.8mm
Width	EN426	1.8m	1.8m	1.8m
Length ^[1]	EN426	15m	15m	15m
Weight	EN430	3500g/m ²	4300g/m ²	5300g/m ²
Fire rating	EN13501	Cfl-s1	Cfl-s1	Cfl-s1
Abrasion resistance	ISO5470-1	≤0.35g	≤0.35g	≤0.35g
Residual indentation	EN433	≤0.5mm	≤0.5mm	≤0.5mm
Flexibility	EN435	Excellent	Excellent	Excellent
Sound isolation	ISO717/2	20-30dB	20-30dB	20-30dB
Friction coefficient	DIN18032	0.45~0.65	0.45~0.65	0.45~0.65
Ball bounce	EN12235	≥90%	≥90%	≥90%
Sliding coefficient	EN13036-4	80~110	80~110	80~110
Shock absorption	EN14308	≥25%	≥25%	≥35%
Vertical deformation	EN14309	≤3mm	≤2mm	≤2mm
Impact resistance	EN1517	≥8N/m	≥8N/m	≥8N/m
TVOC after 28days	ISO 16000	≤10µg/m ³	≤10µg/m ³	≤10µg/m ³



Globalflor can paint white lines before loading, just need install according to roll number once you receive it.
More thickness requirements or customizable types, please send inquiry to our sales.

More documents available for download on SUPERFLEX webpage

Superflex - TDS

Superflex - Installation Guide

Superflex - Maintenance Guide

Superflex - MSDS

Superflex - Warranty

