


ULTRAFLEX

COLOR BOARD AND INTRODUCTION

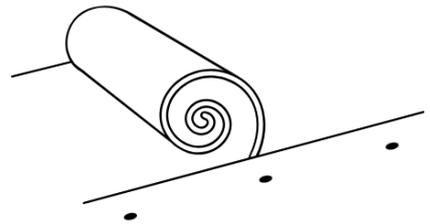

ABOUT GLOBALFLOR

Globalflor® is registered in European Union, owned by Shanghai Bomei Industrial Corporation Ltd, which is a Taiwan investment in China. We Globalflor International Corporation Ltd specializing in the production of vinyl flooring materials include homogeneous flooring, heterogeneous flooring, ESD flooring, sports flooring, rubber-plastic flooring, LVT and SPC. They have been widely used in areas such as Transport, Education, Healthcare, Commercial Buildings, Offices, Residences, Sports and other areas.

Our advanced machineries were imported from German and Japan. At the same time, over 500 legal staffs insist on providing dedicated international standard support with assistance on logistics, dedicated packaging and quality control for global customers. Till now, our monthly capacity can achieve 6,000,000 square meters.

Products of high quality and fashionable, widely used in a variety of architecture, not only has the broad masses of the domestic market, but also been distributed to over 40 countries.

We are committed to sustainable development and customer health protection. Proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health, we have developed the use of a phthalate free plasticizer technology for our vinyl floors which is approved for medical class tools and toys intended to be placed in the mouth by children.

At Globalflor, we strive to support our professional customers and end-users in creating healthy, beautiful, alive and sustainable living spaces. Working with industry partners, we are bringing our best thinking and efforts toward making a positive impact on people and the planet.

Welcome!

Join us and grow together!

The logo for Globalflor, featuring the word "GLOBALFLOR" in a bold, sans-serif font. The letter "O" is replaced by a stylized globe icon with latitude and longitude lines.


**Phthalate-free
100%**

AVAILABLE COLORS


ULTRAFLEX is a special flooring sheet made of Rubber and plastic synthetic materials, no pollution to the environment. Lower cost than rubber flooring, but better performance than vinyl homogeneous flooring. Single layer design, consistent pattern from surface to bottom, long-term lifetime.




GFU 41524
Wilmington Tan



GFU 41525
Jackson Tan




GFU 41533
Rosemary Green




GFU 41612
Blue Jean




GFU 41613
American Cheese




GFU 41614
Blue Danube




GFU 41620
Brilliant Blue




GFU 41632
Merlot Red



GFU 41643
Charcoal Slate



GFU 41644
Black Jack



GFU 41645
Milkway



GFU 41646
Arizona Tan

Key features


Rubber content

Homogeneous structure


R10 slip resistance

Hammered embossment


Long service life




GFU 41721
Juneau Spring



GFU 41767
Sandy Hook Gray



GFU 41768
Whale Gray



GFU 41769
Amherst Gray

More documents available for download on ULTRAFLEX webpage

Ultraflex - TDS

Ultraflex - Installation Guide

Ultraflex - Maintenance Guide

Ultraflex - MSDS

Ultraflex - Warranty


DATA SHEET

Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check official website at www.bomeiflor.com

| | | STANDARD REQUIREMENT | ULTRAFLEX |
|--------------------------------------|----------------------|----------------------|----------------------|
| Thickness | EN428 | | 2.0mm |
| Wear layer thickness | EN429 | | 2.0mm |
| Width | EN426 | | 2m |
| Length^[1] | EN426 | | 20m |
| Weight | EN430 | | 3000g/m ² |
| Plasticizer^[2] | | | DOTP |
| Surface treatment | | | PUR |
| Classification | EN649 | | 34/43 |
| Fire rating | GB/T11785-2005 | | Bfl-s1 |
| Smoke density | GB/T11785-2005 | ≤750% min | Pass |
| Toxic | GB/T20285-2006 | t0 achieve ZA | Pass |
| Slip resistance | DIN EN 16165:2023-02 | | R10 |
| Flexibility | HG/T3747.1-2011 6.6 | | No crack |
| Anti cigarette | HG/T3747.1-2011 6.5 | ≥Level 3 | Level 3 |
| Color fastness | HG/T8427-2019 | ≥Level 3 | Level 4 |
| Dimension stability | HG/T3747.1-2011 6.3 | ±0.4% | Pass |
| Residual indentation | HG/T3747.1-2011 6.8 | 0.25mm | Pass |
| Soluble lead | GB18586-2001.5.4 | ≤20mg/m ² | Pass |
| Soluble cadmium | GB18586-2001.5.4 | ≤20mg/m ² | Pass |
| VOC | GB 18586-2001 | ≤10g/m ² | Pass |
| Formaldehyde emission | GB185B3-2008 | ≤0.5g/kg | Pass |
| Stain and chemical resistance | | | |
| Diluted hydrochloric acid | ISO26987:2008 | | No effect in 2hours |
| 84 Disinfectant | | | |
| Sodium hydroxide (25%) | | | |
| Hydrogen peroxide (30%) | | | |
| Blackening (shoe) | | | |
| Alcohol | | | |

[1] Standard roll length is 20m, there may have ≤10% short rolls come out from production, short roll length between 10m and 19m.

[2] Globalflor adopts environment friendly type plasticizer DOTP only for the production.



PHOTOS GALLERY

