


New collection

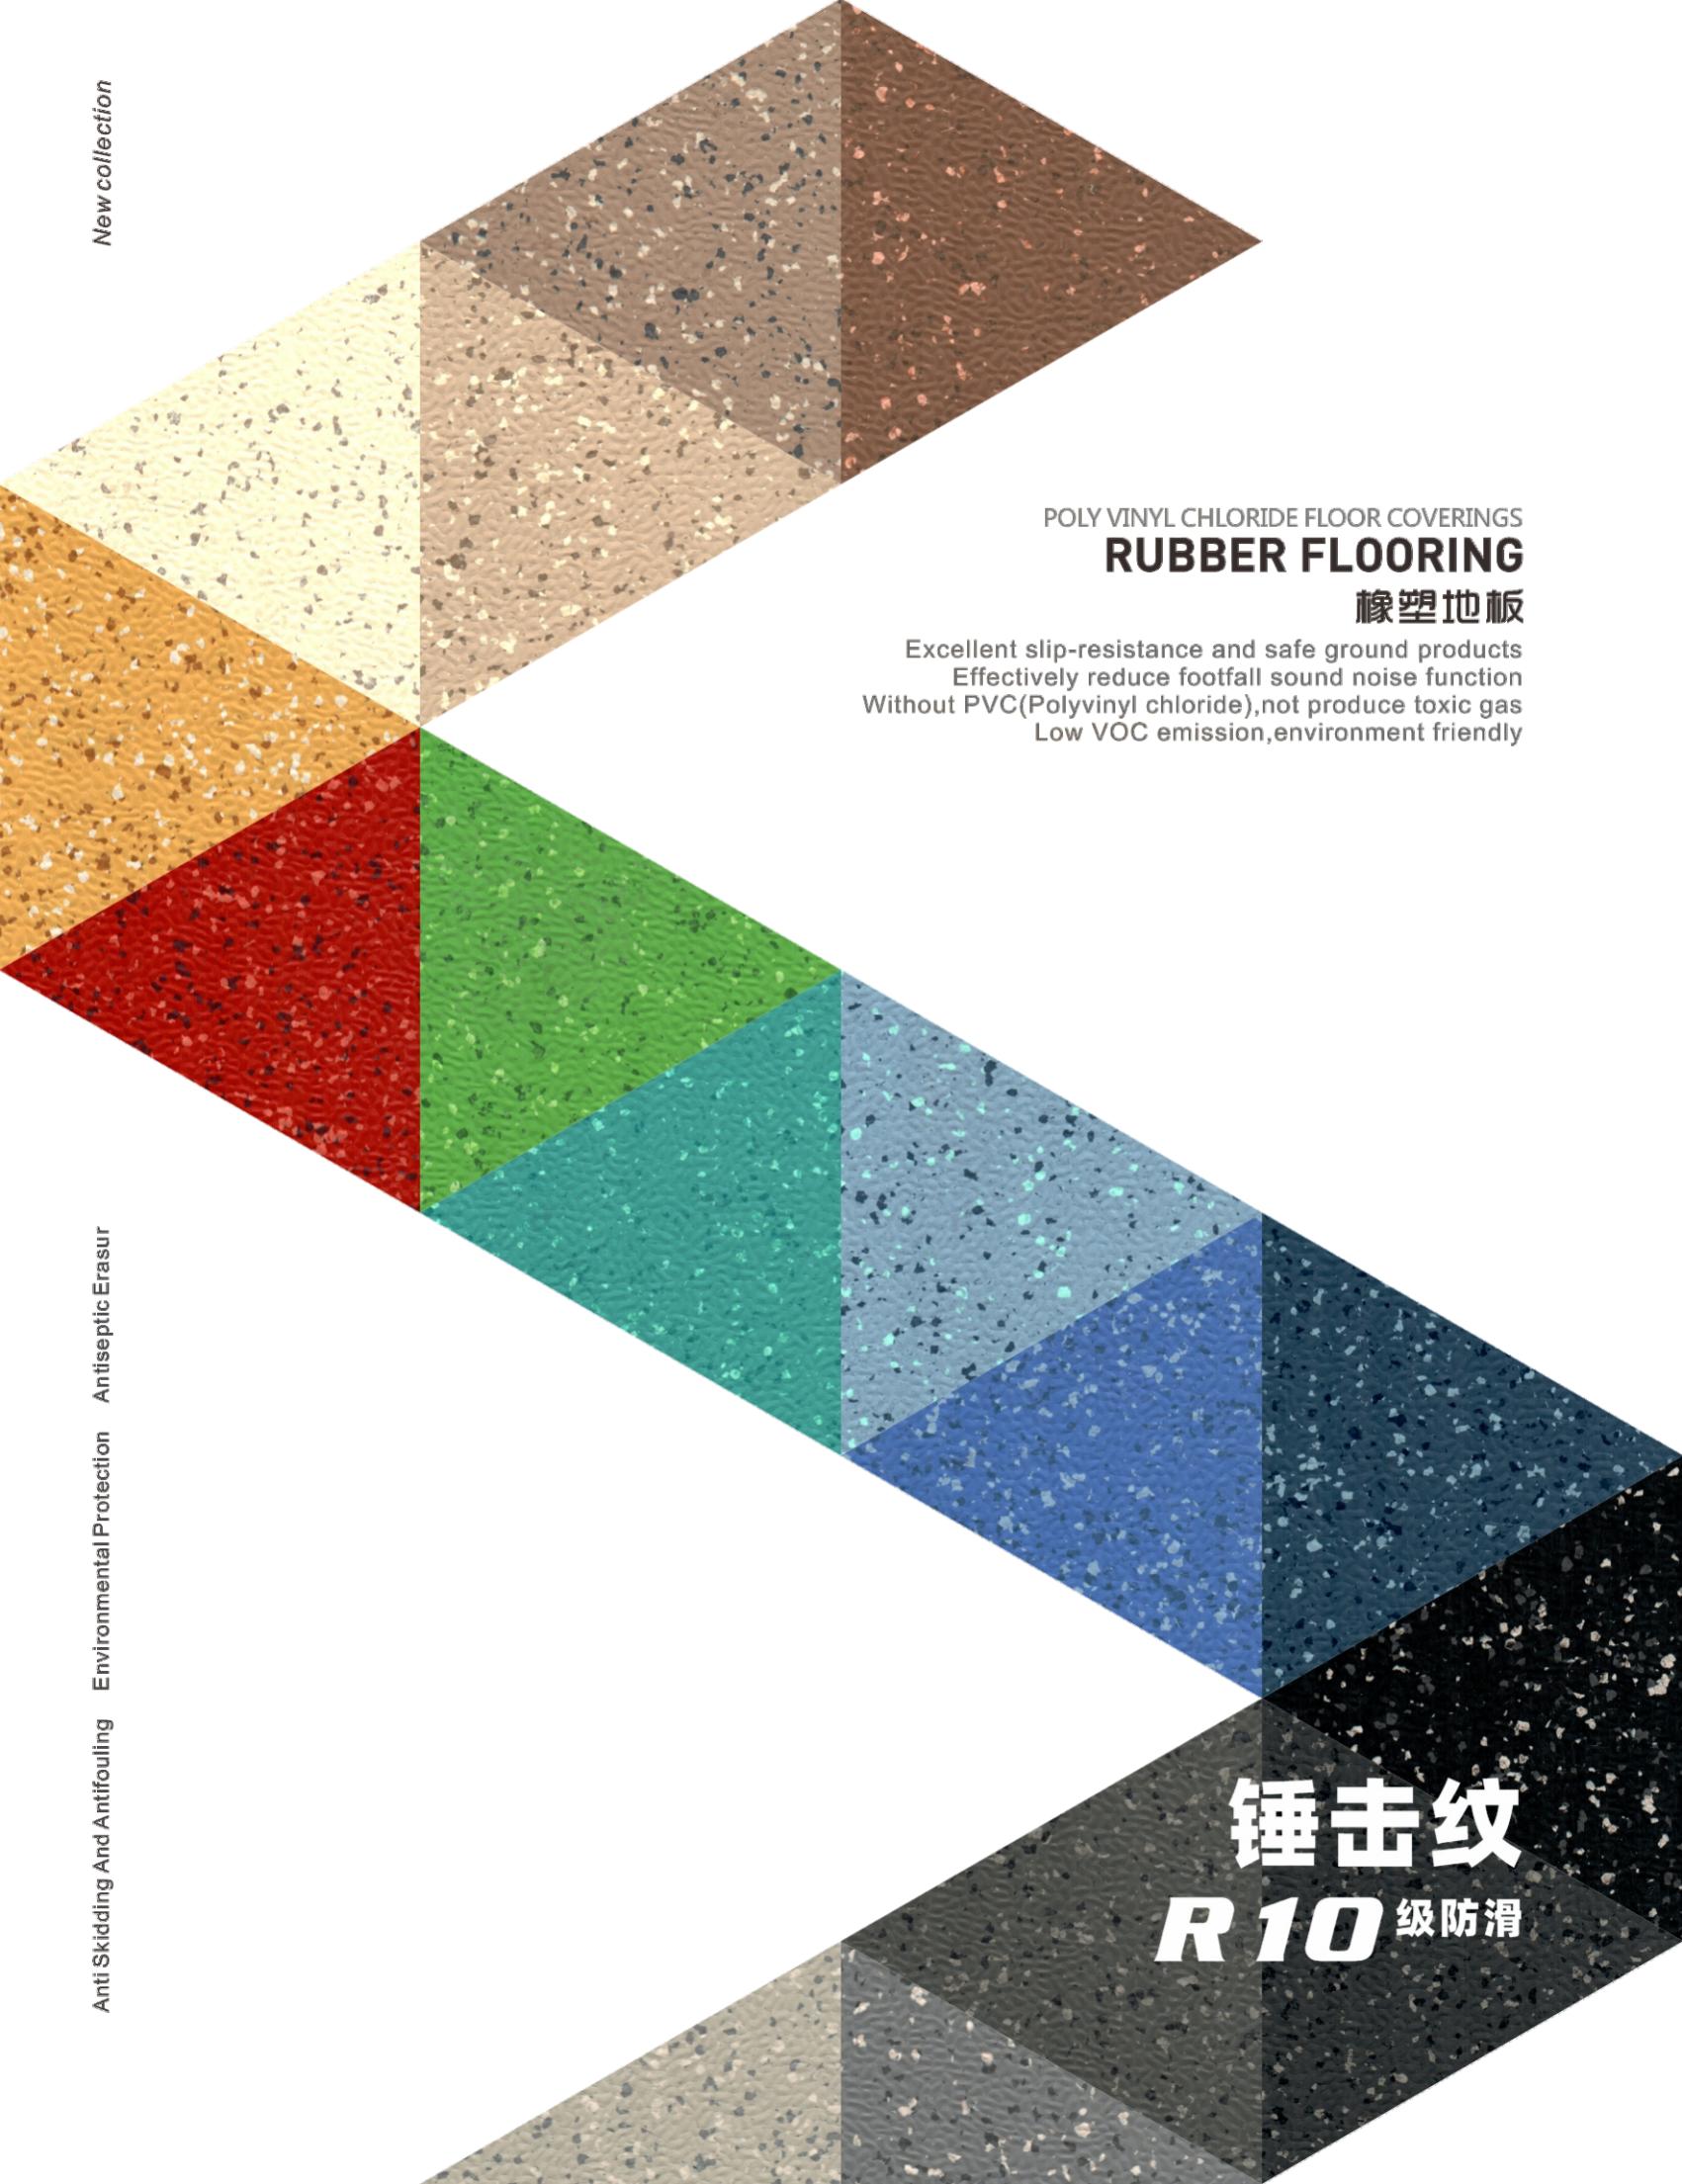

POLY VINYL CHLORIDE FLOOR COVERINGS
RUBBER FLOORING

橡塑地板

Excellent slip-resistance and safe ground products
Effectively reduce footfall sound noise function
Without PVC(Polyvinyl chloride),not produce toxic gas
Low VOC emission,environment friendly

Anti Skidding And Antifouling Environmental Protection Antiseptic Erasur

锤击纹

R10 级防滑

RUBBER FLOORING

橡塑地板



环保地板

环保材料 安全健康 Environmentally friendly safe and healthy

- 100%全新料，无回收料，减少环境污染
100%new materials,no recycling materials,can reduce pollution.
- 生产过程中不使用DOP及重金属
The production process does not use DOP and heavy metals.
- 防霉抑菌，抑制霉菌及细菌生长，关爱健康
It has mould proof antibacterial treatment,which can inhibit bacteria and mold

耐磨 耐污性卓越 Excellent wear resistant and stain resistant performance

- 耐污、耐磨，维护方便，使用人流量大的场所
pollution resistance,wear resistance,easy to maintain,suitable for large flow of people

适用范围 Application

适用于医疗卫生、公共建筑、教育机构、体育场馆、交通枢纽、工业建筑、展览展厅、商业场所、零售服务等高人流量场所。
Applicable for sites of high passenger flows,such as health care,public buildings,educational institutions,stadiums,transportation hubs,industrial buildings,exhibition halls,commercial establishments,retail services,etc:




RUBBER FLOORING

橡塑地板


SIZE: 2.0mm x 2m x 20m 特殊厚度可定制




环保地板

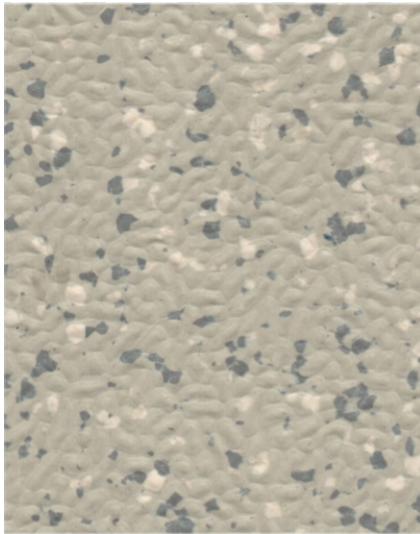


XS-4767 3.0mm

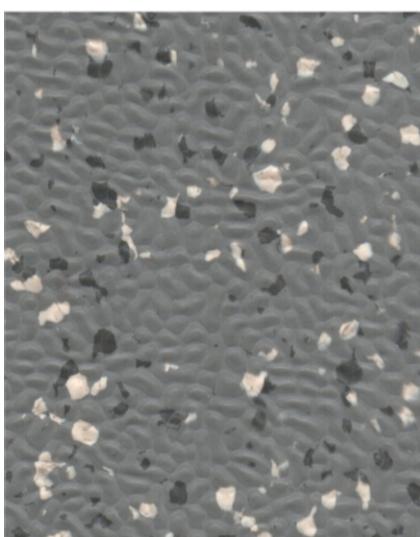


XS-4768

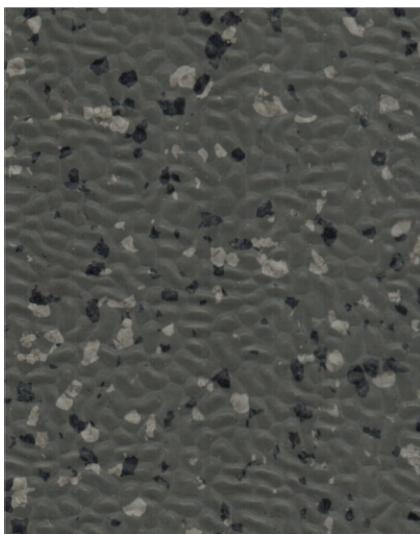

XS-4769

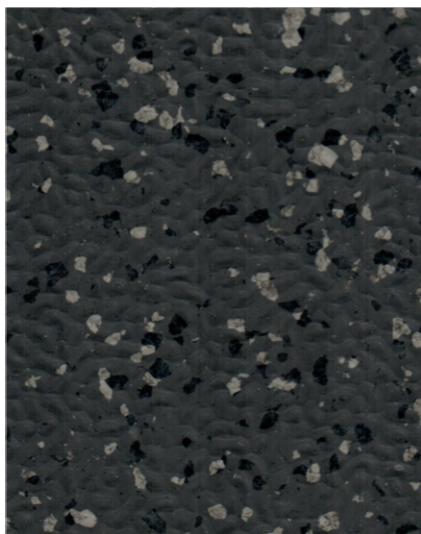

XS-4643

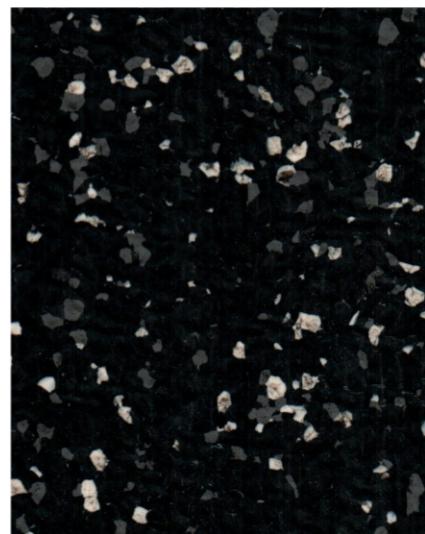

XS-4644


RUBBER FLOORING

橡塑地板


SIZE: 2.0mm x 2m x 20m 特殊厚度可定制




环保地板

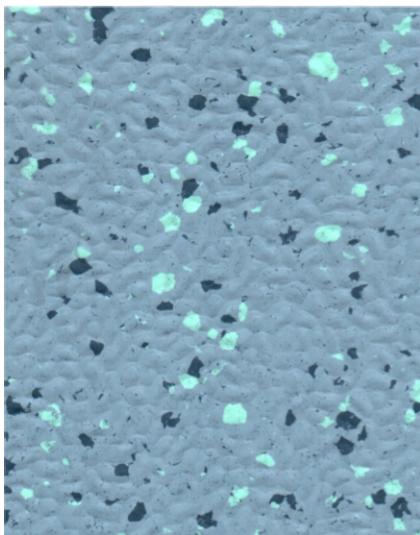


XS-4612 3.0mm

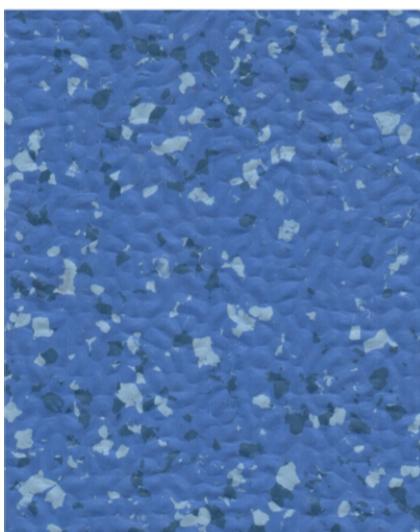


XS-4620

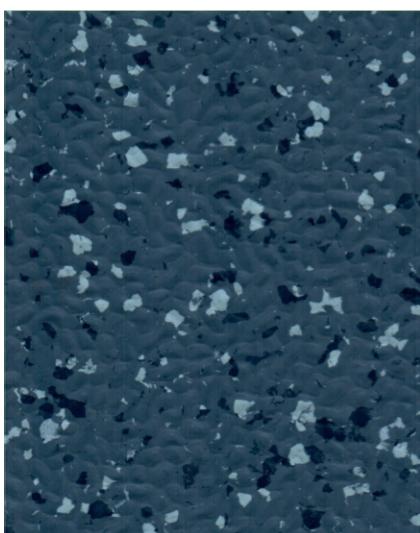

XS-4614

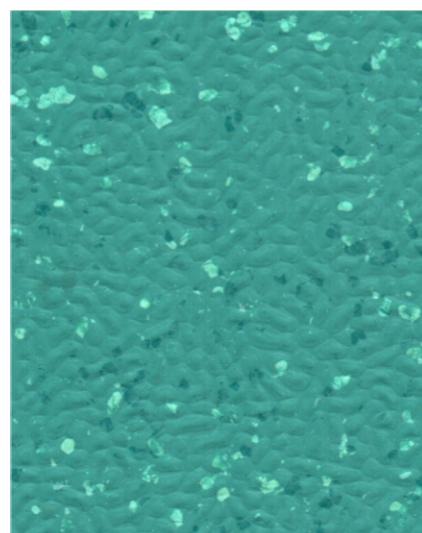

XS-4721 3.0mm

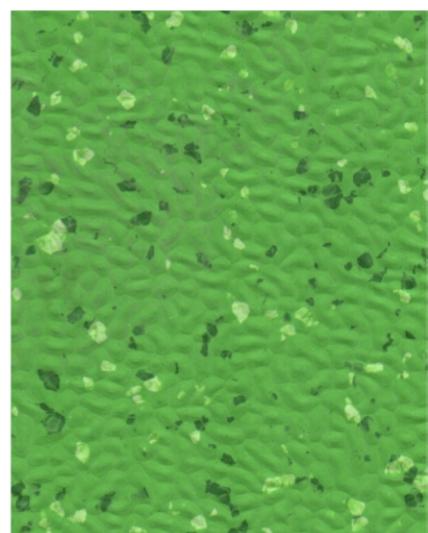

XS-4533


RUBBER FLOORING

橡塑地板


SIZE: 2.0mm x 2m x 20m 特殊厚度可定制




环保地板

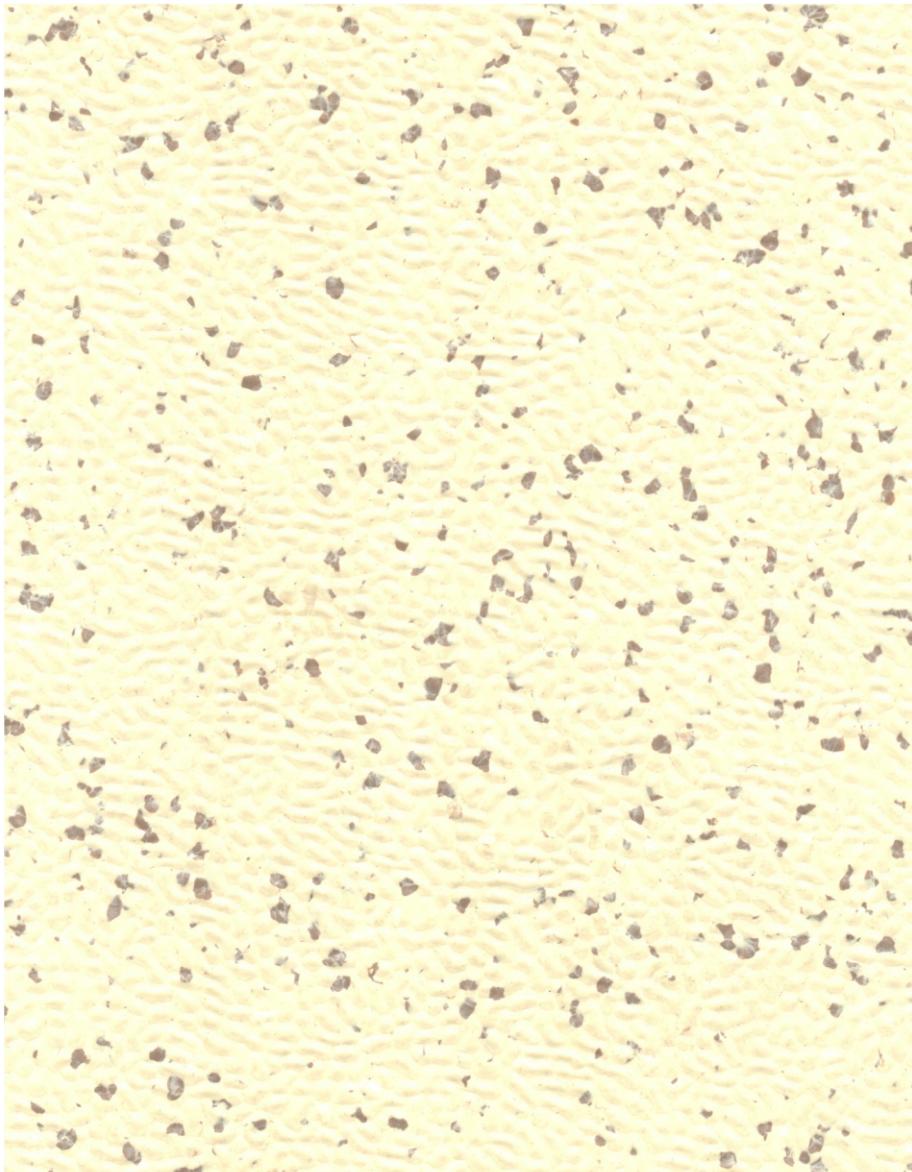


XS-4645 3.0mm

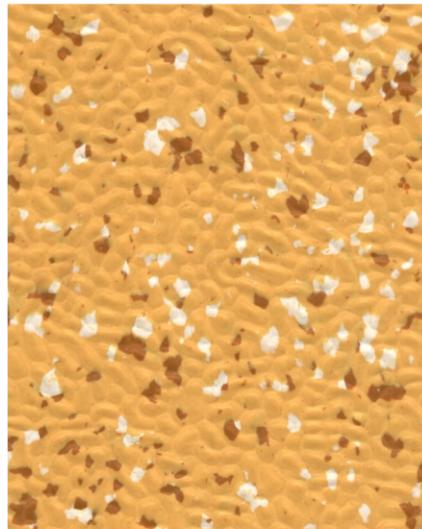


XS-4613

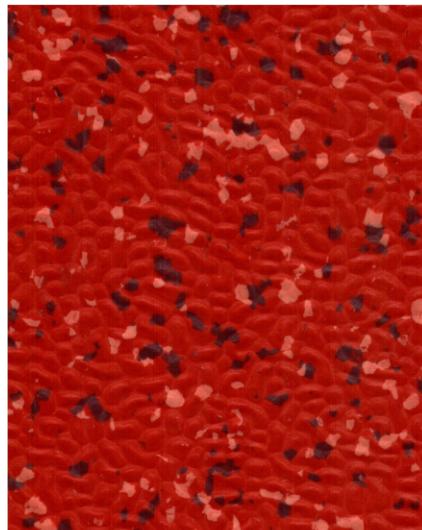


XS-4632

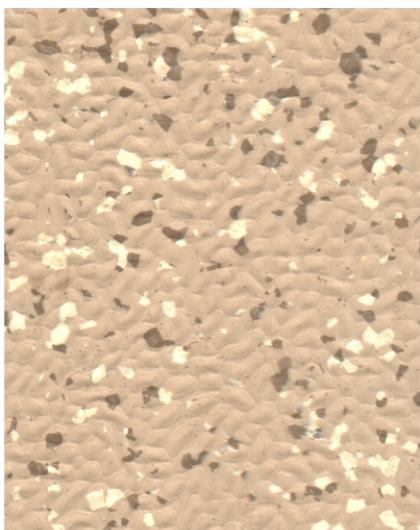

XS-4646

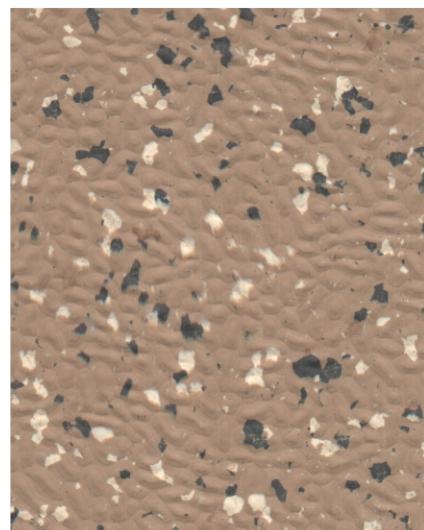

XS-4524

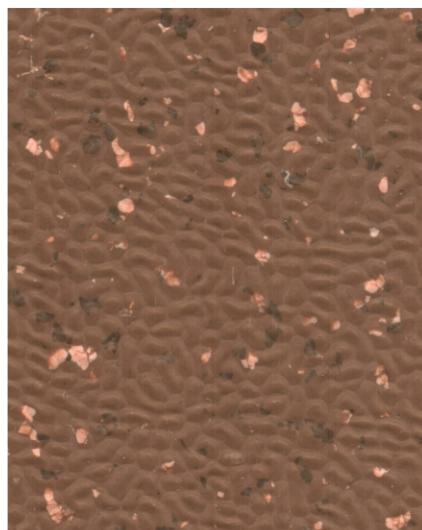

XS-4525

RUBBER FLOORING

橡塑地板

技术参数 Technical data

检测项目	检测标准	标准要求	单位	检测结果
总厚度	EN 428		mm	2mm
卷宽	EN 426		米	2m
残余凹陷	HG/T3747.1-2011 6.8	0.25mm	mm	符合
尺寸稳定性	HG/T3747.1-2011 6.3	纵向±0.4%	%	符合
		横向±0.4%	%	符合
防滑等级	DIN51130-2014		级	R10级
抗弯曲性能	HG/T3747.1-2011 6.6	无裂纹		无裂纹
耐烟头灼烧	HG/T3747.1-2011 6.5	≥3级	级	3级
耐人造光色牢度	HG/T8427-2019	≥3级	级	4级

环保检测

氯乙烯单体	GB18586-2001.5.3		mg/kg	符合
可溶性铅	GB18586-2001.5.4	≤20	mg/m ²	符合
可溶性镉	GB18586-2001.5.4	≤20	mg/m ²	符合
挥发物	GB18586-2001.5.5	≤50	g/m ²	符合
游离甲醛	GB185B3-2008	≤0.5	g/kg	符合

耐污性能和耐化学性检测

稀盐酸	ISO 26987:2008	2h	h	无影响
84消毒液	ISO 26987:2008	2h	h	无影响
氢氧化钠(25%)	ISO 26987:2008	2h	h	无影响
氢过氧化氢(30%)	ISO 26987:2008	2h	h	无影响
黑色鞋油	ISO 26987:2008	2h	h	无影响
酒精	ISO 26987:2008	2h	h	无影响

防火检测

燃烧长度	GB/T8626-2007	Bf1≤150	FS,mm	符合
临界辐射通量	GB/T11785-2005	Bf1≥8.0	CHF.kw/m ²	符合
产烟量	GB/T11785-2005	S1≤750	%.min	符合
产烟毒性	GB/T20285-2006	t0达到ZA	级	符合



DOP检测值
未检出



儿童玩具标准
重金属未检出



甲醛释放量
检测值为0



欧盟高危致癌物
未检出



释放量28天检测
欧标1/200



样本仅供为选色使用
封样请以实际大样为准