


SYMBOL

MAINTENANCE INSTRUCTIONS

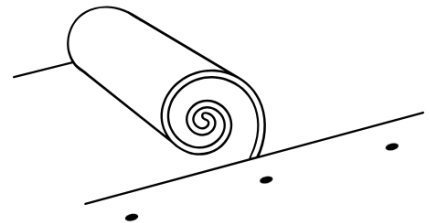

H O M O G E N E O U S V I N Y L F L O O R I N G S H E E T

ATTENTION

! Clean the flooring on a regular basis, as this is more cost-effective and hygienic than occasional heavy-duty cleaning.

! Always follow the dosage instructions for cleaning products carefully.

! Wipe up grease and oil spills immediately, as they may damage the floor surface.

! Resilient flooring is susceptible to damage from solvents.

! Black rubber wheels and rubber foot pads may discolor the flooring. All chair and table legs shall be fitted with high-quality floor protectors. Felt pads are not recommended for commercial spaces, and hard plastic protectors are preferred.

! Please note that light-colored flooring requires more frequent cleaning.




PREVENTIVE CARE – ENTRANCE MAT

Approximately 80% of surface dirt requiring cleaning is tracked in from outdoors.

Up to 90% of this dirt can be prevented with a properly sized, high-performance entrance mat.

The less dirt that enters via the entrance area, the lower the ongoing maintenance requirements.

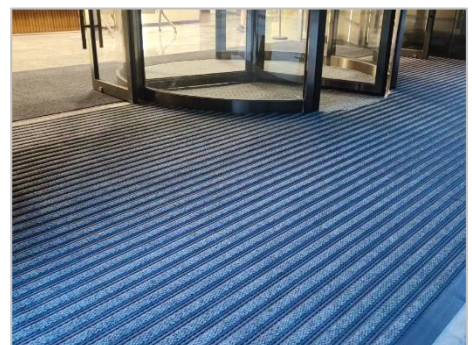

ROUTINE MAINTENANCE – ENTRANCE MAT

DAILY

Dust mop or vacuum to remove dust and loose surface dirt.
Perform spot cleaning with a neutral detergent to remove stubborn stains as needed.

WEEKLY

Inspect the floor condition and carry out the following procedures as required:

For light scuff marks: Conduct dry buffing using a rotary machine with a minimum speed of 1000 rpm, fitted with an appropriate cleaning pad.



For heavy dirt buildup: Machine-scrub the floor with a scrubber dryer (approx. 165 rpm) fitted with an appropriate cleaning pad, using a neutral detergent as applicable. Rinse the floor thoroughly and allow it to dry completely. Finish with dry buffing to restore the surface finish.

