

	VICTORIA	VICTORIA ⁺	NAIVETE
FOMART			
Total thickness EN 428 / ISO 24346	2mm	2mm	2mm
Width&Length ¹ of sheet EN 426 / ISO 24341	2m*20m	2m*20m	2m*20m
Weight EN 430 / ISO 23997	3150g/m²	2800g/m²	3400g/m²
Surface reinforcement	PUR	FimTech V2	PUR
Special treatment ²	-	OHST ⁺ CleanCare ⁺	UniTech

CLASSIFICATION			
Fire rating EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
Slip resistance DIN 51130	R9	R9	R9
Color fastness ISO 105-B02	≥ 6	≥ 6	≥ 6
Static electrical propensity EN 1815	< 2KV	< 2KV	< 2KV
Electrical resistance EN 1081	> 10 ⁹ Ω	> 10 ⁹ Ω	> 10 ⁹ Ω

PERFORMANCE			
Abrasion resistance EN 660-2	P	T	T
Binder content EN ISO 10581	Type II	Type I	Type II
Dimension stability ³ EN 434 / ISO 23999	≤ 0.1%	≤ 0.1%	≤ 0.1%
Residual indentation ⁴ EN 433 / ISO 24343-1	0.01mm	0.01mm	0.01mm
Flexibility EN 435 / ISO 24344	No crack	No crack	No crack
Chemical resistance EN 423 / ISO 26987	OK	OK	OK
Anti-bacterial activity ISO 22196	Good	Excellent	Good
Impact sound isolation ISO 717-2	Approx. 4dB	Approx. 4dB	Approx. 4dB

ENVIRONMENT / INDOOR AIR QUALITY			
TVOC ISO 16000-6	< 10µg/m³	< 10µg/m³	< 10µg/m³
Thermal resistance EN ISO 10456	0.01m² · K/W	0.01m² · K/W	0.01m² · K/W
Smoke density ASTM E662-13A	≤ 750% min	≤ 750% min	≤ 750% min
Formaldehyde emission EN 14041	E1	E1	E1
PCP EN 14041	ND	ND	ND



100% Phthalate-free



IN-GZ-CP-5627-23105



Castor chair suitable

Rubber leaves permanent stains on PVC flooring. Do not use mats with rubber backing, replace tubular furniture feet with PVC or PU alternatives. Install entry mats of adequate length at doorways to trap dirt brought in from outdoors.

Globalflor reserves the right to make revisions at any time without prior notice. Due to technical updates and adjustments, users may verify the validity of this document with us prior to use. ¹ Standard length of sheet is 20m, there may have no more than 10% short rolls (length between 10m and 19m). ² Please refer to CleanCare⁺ and OHST⁺ introduction for more details. ³ Test standard required value 50.4%, best measured value 0.1%. ⁴ Test standard required value 50.1mm, best measured value 0.01mm.



www.borneiflor.com


Working in collaboration with specialized laboratories, we have developed an exclusive new surface reinforcement technology. Incorporated with high-molecular polymers, the flooring's scratch resistance far outperforms that of common UV treatment. This innovative technology effectively mitigates flooring damage caused by high heels, hospital bed casters and other sharp objects during daily use. **FimTech V2** is also integrated with Globalflor **OHST** anti-mold and anti-bacterial technology and **CleanCare** anti-iodophor technology.



Above photos are based on internal lab tests, in which keys were used to scratch flooring surfaces with consistent applied force.

Anti-bacterial Mildew-proof

It incorporates a non-toxic organic bactericide that eliminates hundreds of types of microbes. This antimicrobial formulation holds official certification from the U.S. Environmental Protection Agency (EPA).

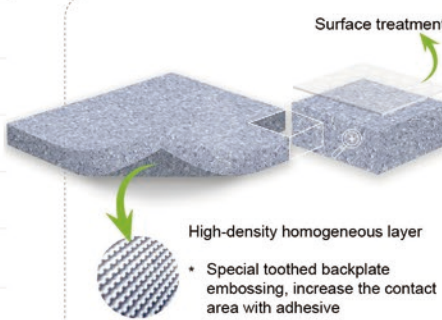

Compact homogeneous vinyl floorcoverings are engineered for high-traffic commercial and public environments with long service life and easy maintenance requirements. Featuring a single-layer dense vinyl structure, it is fully adhered to the subfloor with heat welded joints to form a seamless surface.



Boasting exceptional toughness, durability and cleanliness, it is particularly recommended for:

- Healthcare
- Education facilities
- Transport hubs
- Shopping malls
- Other commercial premises

GLOBALFLOR HOMOGENEOUS


VICTORIA · NAIVETE




VICTORIA · NAIVETE



NAIVETE

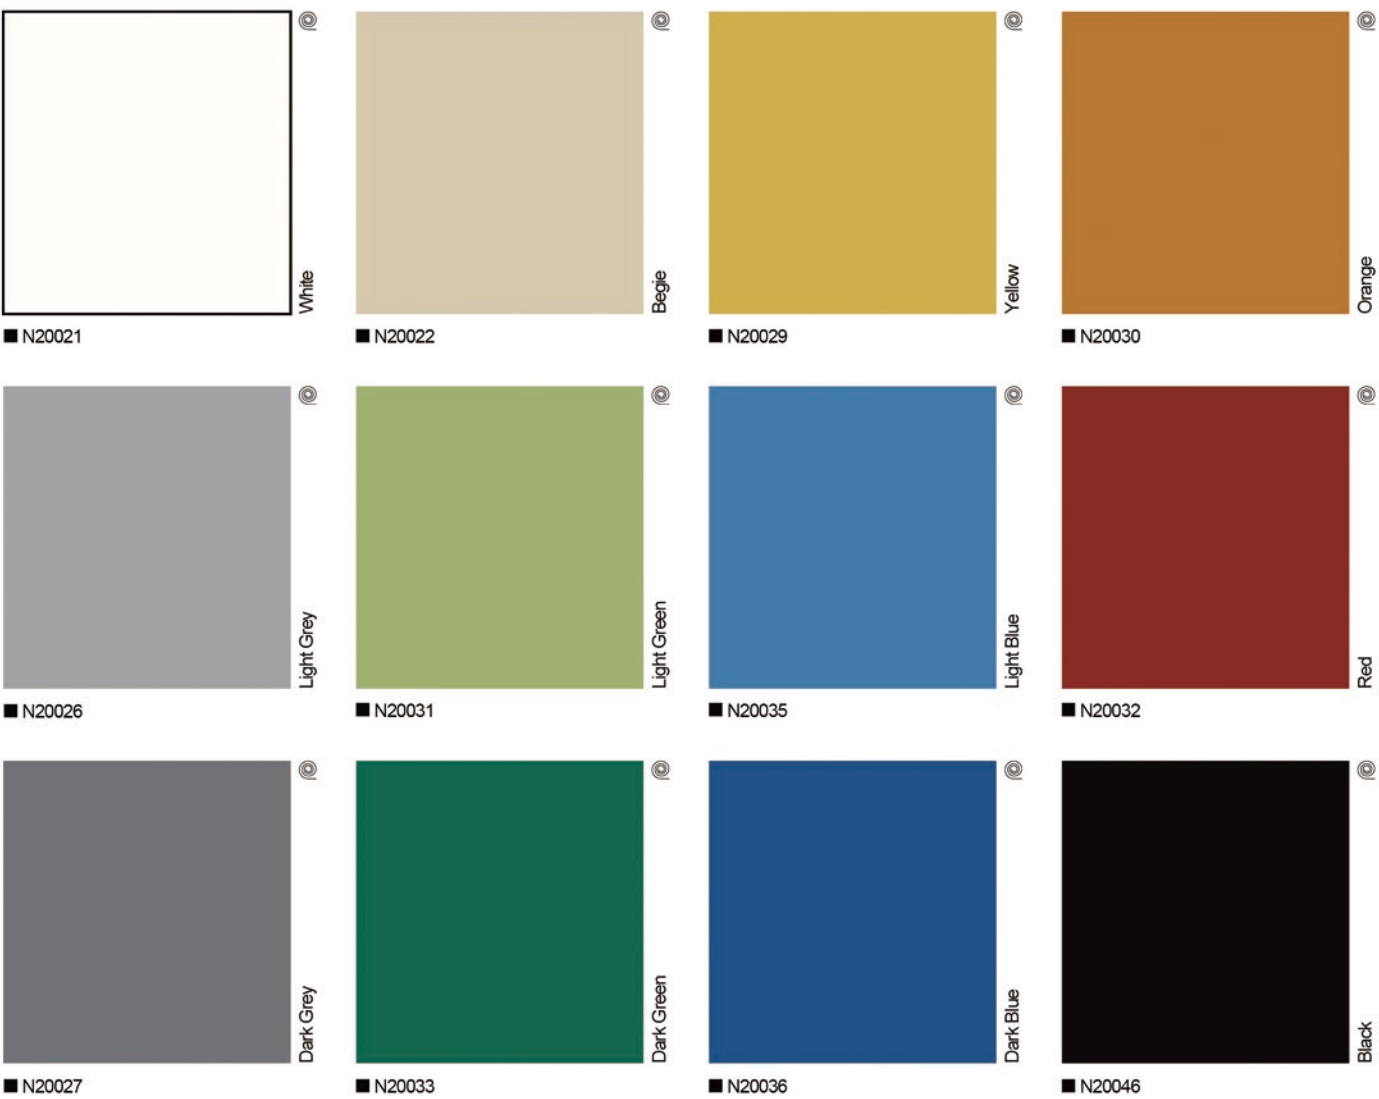

VICTORIA

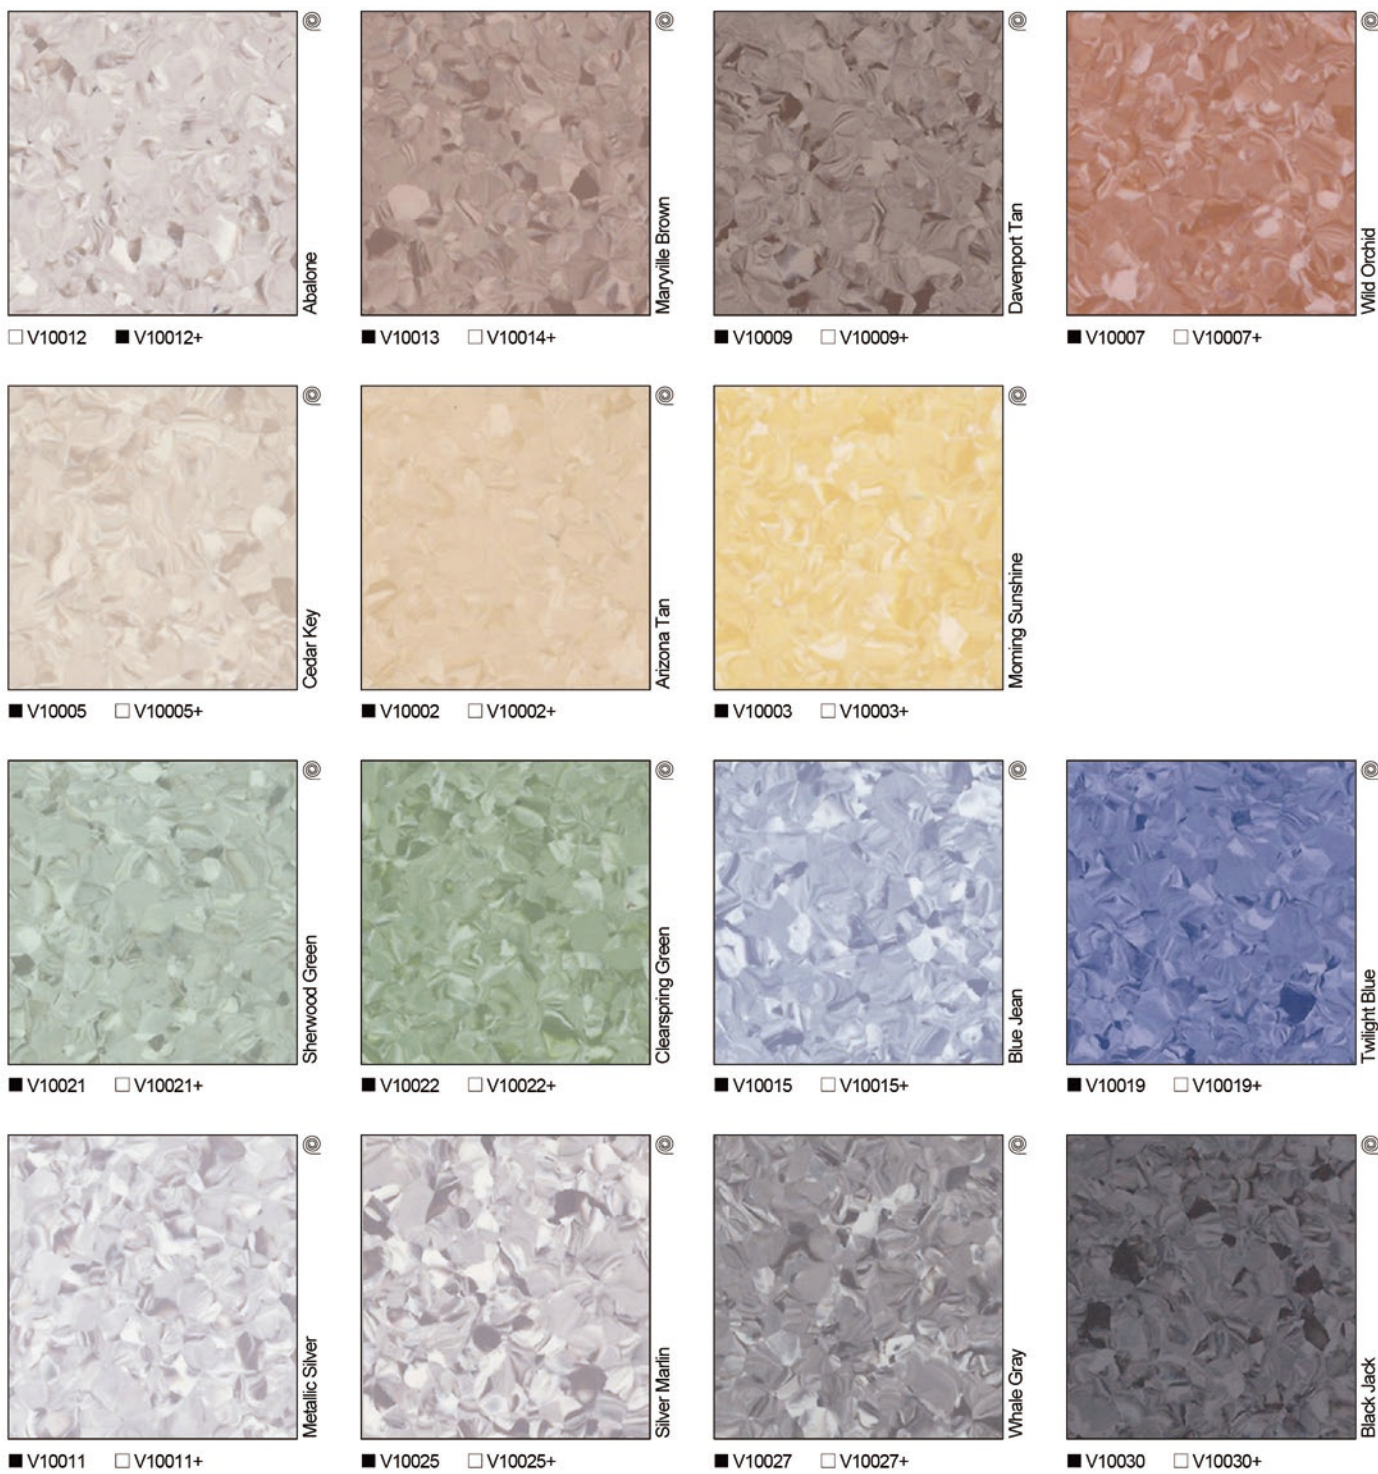

R10
We innovatively adopt exclusive embossing on the surface, which not only upgrades anti-slip performance of the flooring to Class R10, but also effectively enhances its scratch resistance.
Customizable function.

CLEANCARE
A new generation of surface treatment for the flooring of the future. It strengthens the chemical resistance performance of flooring, especially iodine and its relevant solution which are frequently used in hospital